


### Universal Lip Mount Camera with Vertical and Horizontal Flip Image Function

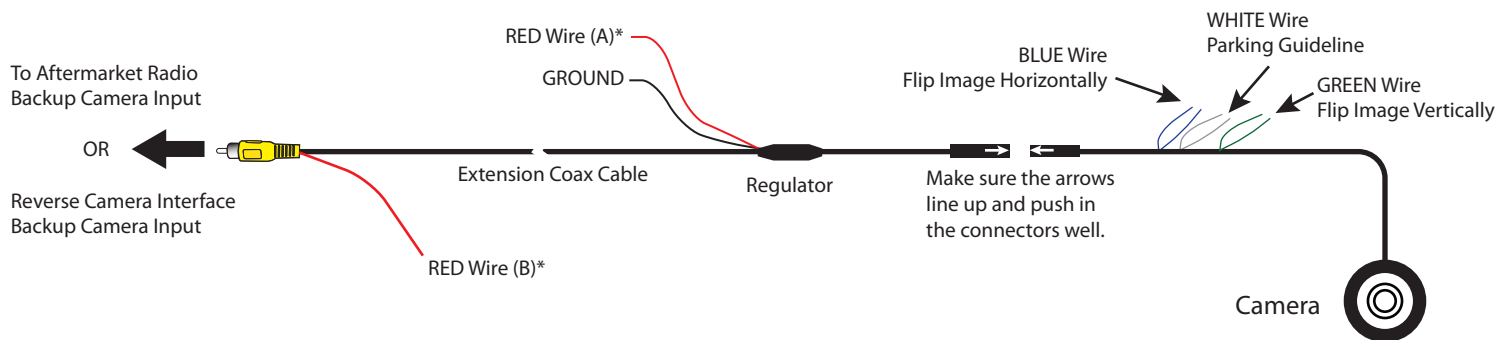

\*NOTE: To power the camera, use RED Wire A or B. If tapping power from the radio or RVC Interface, make sure to insulate RED Wire A to avoid it from shorting. If you will be tapping power from the reverse light +12V, insulate RED Wire B to avoid it from shorting. With either connection the Black GROUND wire needs to be connected to a solid chassis ground. For vehicles with manual transmission, we recommend tapping +12V power from the reverse light.

WHITE Wire: Connect to show parking guide line. Disconnect to remove.

BLUE Wire: Connect to flip image horizontally to use as front facing camera. Disconnect to use as reverse camera.

GREEN Wire: Connect to flip image vertically to use as top mount camera. Disconnect to use as lip mount.

