

PRODUCT FEATURES:

- Automatically switches to rear-view when vehicle is in reverse gear.
- Aftermarket lip mount rear view camera included.
- Plug & Play Installation.

PARTS INCLUDED:




RVCHN-76C Harness




CUL-03 Lip Mount Camera

INSTALLATION DIAGRAM:

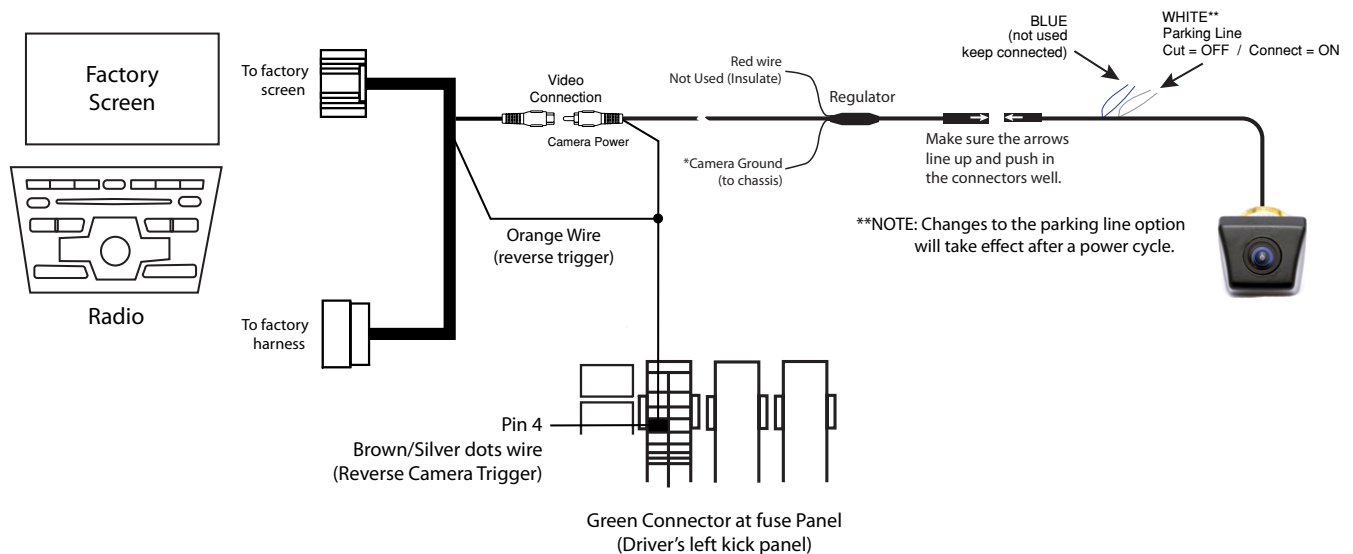

Use a length of 18 gauge wire (not included) and tap the RED camera power wire from the Yellow RCA and ORANGE reverse trigger wire to pin# 4 (BROWN/SILVER dots) wire on the Green connector in the fuse panel. This is the factory reverse trigger wire.

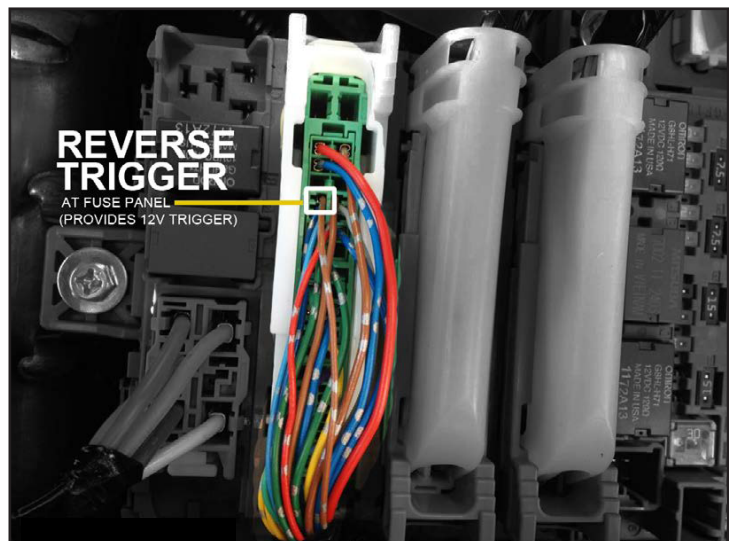

INSTALLING THE CAMERA:

1. Remove the rear trunk panel cover.
2. Drill a 5/8" hole using the hole saw included on the lip under the Honda emblem. Drill the hole at the as close as you can to the center of the vehicle.
3. Fish the camera cable through 5/8" hole. Do not secure the camera yet until after testing the viewing angle.
4. Plug the 4 pin barrel connector of the camera cable to the extension cable provided.
5. Route the cable towards the radio location.
6. Remove the radio to gain access to the factory screen.
7. Plug the Yellow male RCA of the extension cable to the Yellow female RCA of the RVCHN-76C harness.
8. Unplug the 32 pin connector from behind the screen and plug it to the RVCHN-76C t-harness. Plug the other end of the t-harness to the screen.
9. Tap the red wire coming out of the Yellow RCA and the Orange reverse trigger wire from the RVCHN-76C t-harness to the BROWN/SILVER dots reverse wire found at the fuse panel.
10. Test the camera for functionality before installing.

VEHICLE APPLICATIONS:

HONDA

2012 - 2013 Civic



NOTE:

Compatible on vehicles WITHOUT Navigation option.

