



# REAR-VIEW INTEGRATION INTERFACE FOR PORSCHE VEHICLES 2008-UP w/ PCM3.1 & PCM 3.0

## RVCPR-66

### PORSCHE

2014 - 2015 911 GT3  
2013 - 2015 911 (from Software Version 4.xx ONLY)  
2014 - 2015 Boxster (from Software Version 4.xx ONLY)  
2008 - 2015 Cayenne  
2014 - 2015 Cayman (from Software Version 4.xx ONLY)  
2010 - 2015 Panamera

Disclaimer: Depending on the HW version of your PCM system, this product may not support some versions. Please contact us for more information.

### APPLICATION NOTES:

ONLY FOR VEHICLES WITHOUT  
FACTORY REAR-VIEW CAMERA

### WORKS FOR:

PCM 3.1 NAVIGATION RADIOS  
PCM 3.0 NAVIGATION RADIOS  
(Cayenne Only)

Internal DVD player will not be  
able to be watched while in  
motion.

Contact Tech Support for more  
information.

### PARTS INCLUDED

(1) PR-66 CAN Interface Module  
(1) PR-66 40-Pin T-Harness  
(1) C-02 Camera  
(1) 15ft Extension  
(1) Instruction Sheet

### SAFETY PRECAUTIONS


1. Please read through the entire instruction manual before starting any of the installation procedures.
2. We recommend disconnecting the negative side of the battery until ready to code the vehicle.
3. Do not install any of the main modules near any major components or near the HVAC system, as placing items near the HVAC may cause damage or overheating to the vehicle or interface.
4. We recommend not disconnecting any of the air bag connections behind the dash panels.
5. This product is under Crux's 1 year manufacturer's warranty. Warranty may be voided in the case where the device shows proof of being opened or improper extreme force.

### TECH SERVICES

All our products are manufactured under strict quality control. Each device is being tested before shipment. If nevertheless do occur problems or if you have technical questions, contact us directly:

Crux Interfacing Solutions Tech Support  
1 (855) 822-1348 (Mon - Fri - 9:00 AM - 5:00 PM) Pacific Time


### INSTALLATION OVERVIEW

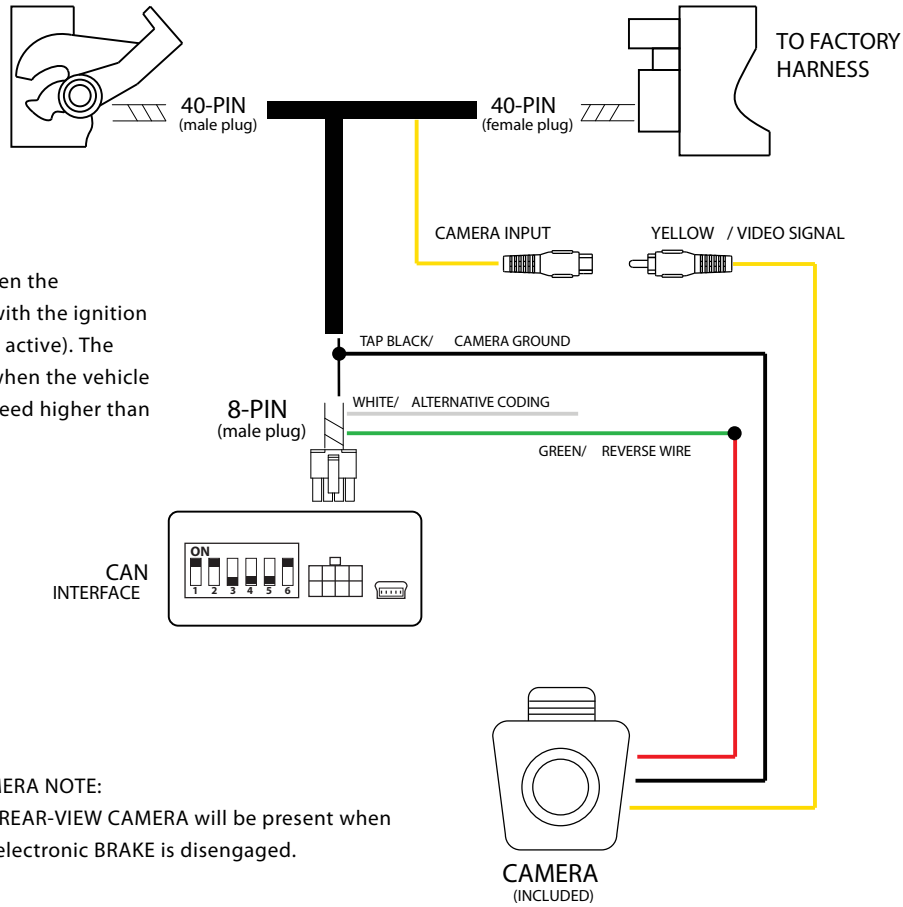


### DIP SWITCHES OVERVIEW

Make sure to set dip switch number 6 to "ON" position.


For the RVC feature, you will only need to set dip switch "2" to ON.



### VIDEO IN-MOTION



### NO VIDEO IN-MOTION



### CONNECTING THE INTERFACE

Follow these steps to properly install interface module.

**Step 1** - Remove the factory radio to gain access to the factory 40-Pin connector.

Remove the factory 40-Pin connector. Your radio face may differ.



**Step 2** - Prior to connecting the interface, we recommend taping the 4 wires necessary to power the module.


Connect the 4 loose wires from the harness to the 4 designated wires on the factory 40-Pin connector.

### Factory Connector Pin Assignments

COLOR	DESCRIPTION	TAP PIN
RED =	12V CONSTANT	15
BLACK =	GROUND	12
ORANGE/BROWN =	CAN-LOW	9
ORANGE/PURPLE =	CAN-HIGH	11

Crux holds no liability for the vehicle wiring color codes and pin configuration.

As there may be changes by the vehicle manufacturer that we may not be aware of. Installer must verify this information prior to being installed.

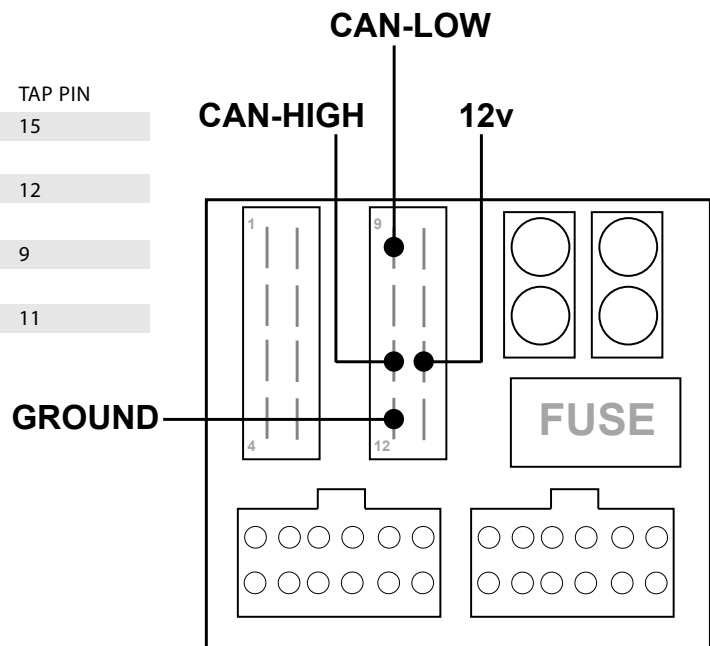

### INSTALLING THE INTERFACE

Follow these steps to properly install the interface module. Prior to installing the interface we recommend disconnecting the negative side of the battery. use a resistor lead if needed, as the manufacturer does not suggest disconnecting the battery cable.

Step 3 - Connect the module to the 8-Pin connectors on the provided T-Harness.

Make sure your connection is firmly inserted into the module.



Step 4 - Mate the 40-Pin T-harness connections, to the factory harness and to the back of the factory radio.

After connecting the module, set dip switch number "6" to the "ON" position. (Latch locks and releases harness)



### CODING THE VEHICLE

In order to activate the Rear-View Camera feature, the installer must CODE the car first.

Step 5 - While listening to the FM Source, place dip switch number "2" to the "ON" position on the module.  
The screen will power off and begin to reset.



#### DIP SWITCH DESCRIPTION LOCATED ON THE CAN MODULE.

☒ UP=ON
 ☐ DOWN=OFF

DIP 1 = Video In-Motion Enable

DIP 2 = Factory Rear-View Camera

DIP 3 = Code Rear-View Cam w/ White Wire

DIP 4 = Code Park Assist w/ White Wire

DIP 5 = Not Used

DIP 6 = Can-Bus Termination

#### LED INDICATORS

##### DATALINK LED:

Blinking = BUS Detected.

OFF = Power Down/ Sleep mode.

##### POWER LED:

ON = Power On

OFF = Power OFF

After each change of the DIP switch settings, we recommend powering down the module, then restarting the vehicle.

### TECH TIP:


IN THE CASE THAT THE VEHICLE IS MANUAL TRANSMISSION, THE INTERFACE WILL NOT PROVIDE YOU THE REVERSE OUTPUT. YOU WILL NEED TO TAP THE CARS REVERSE LIGHT TO THE GREEN WIRE FROM THE 8-PIN CONNECTOR ON THE MODULE.

Step 1. Remove the GREEN wire (Pin 2) from the 8-Pin connector.

Step 2. Connect the GREEN wire to the REVERSE light from the car. We recommend using a DIODE when connecting.

Step 3. Make sure nothing is populating Pin 2 on the 8-Pin connector.

TO REVERSE LIGHT  
CATHODE TOW ARDS LIGHT

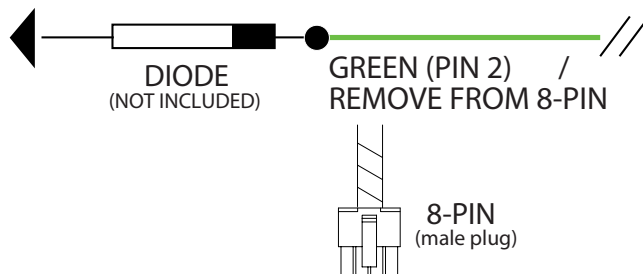



### CODING THE VEHICLE

In order to activate the Rear-View Camera feature, the installer must CODE the car first.

Step 6 - With the T-Harness and interface module properly connected, turn the ignition to the "ON" position.  
Wait for the head unit to power on then proceed to the following steps.


On the left side of the steering wheel:

1. Press and Hold both the "Hash Key" and "Answer" buttons for 10 approx. 10 seconds.

During the coding process, the Red and Blue LED will begin to flash.

2. After the head unit has began to reset, release both buttons.


The Red and Blue LED's will glow solid to identify the coding has been completed.

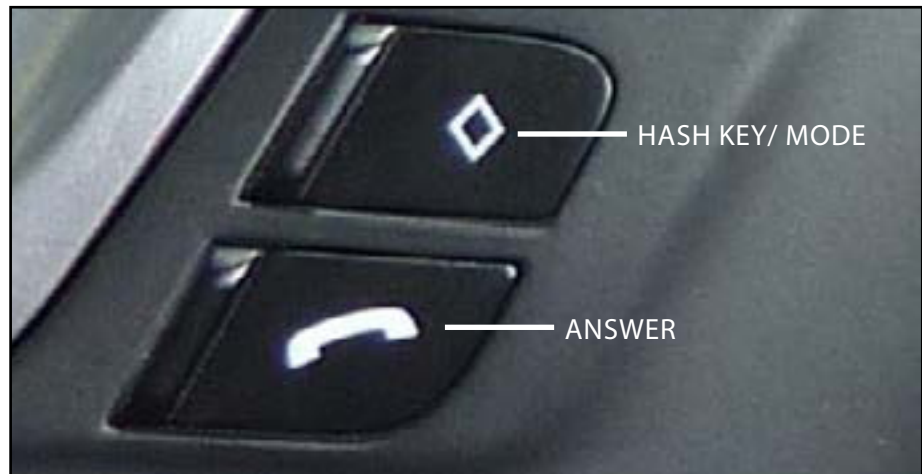

Step 7 - With the interface coding successful, you will be able to enter the menu structure and see "Rear-View Camera" in the menu structure.



**Step 8** - Now you may proceed to installing the Rear-View Camera. Make sure to use the 8-Pin connector for REVERSE and GROUND for the camera. (See Installation Overview) Note: The vehicle display offers a Zoom + and Zoom - option, this interface does not support this option.

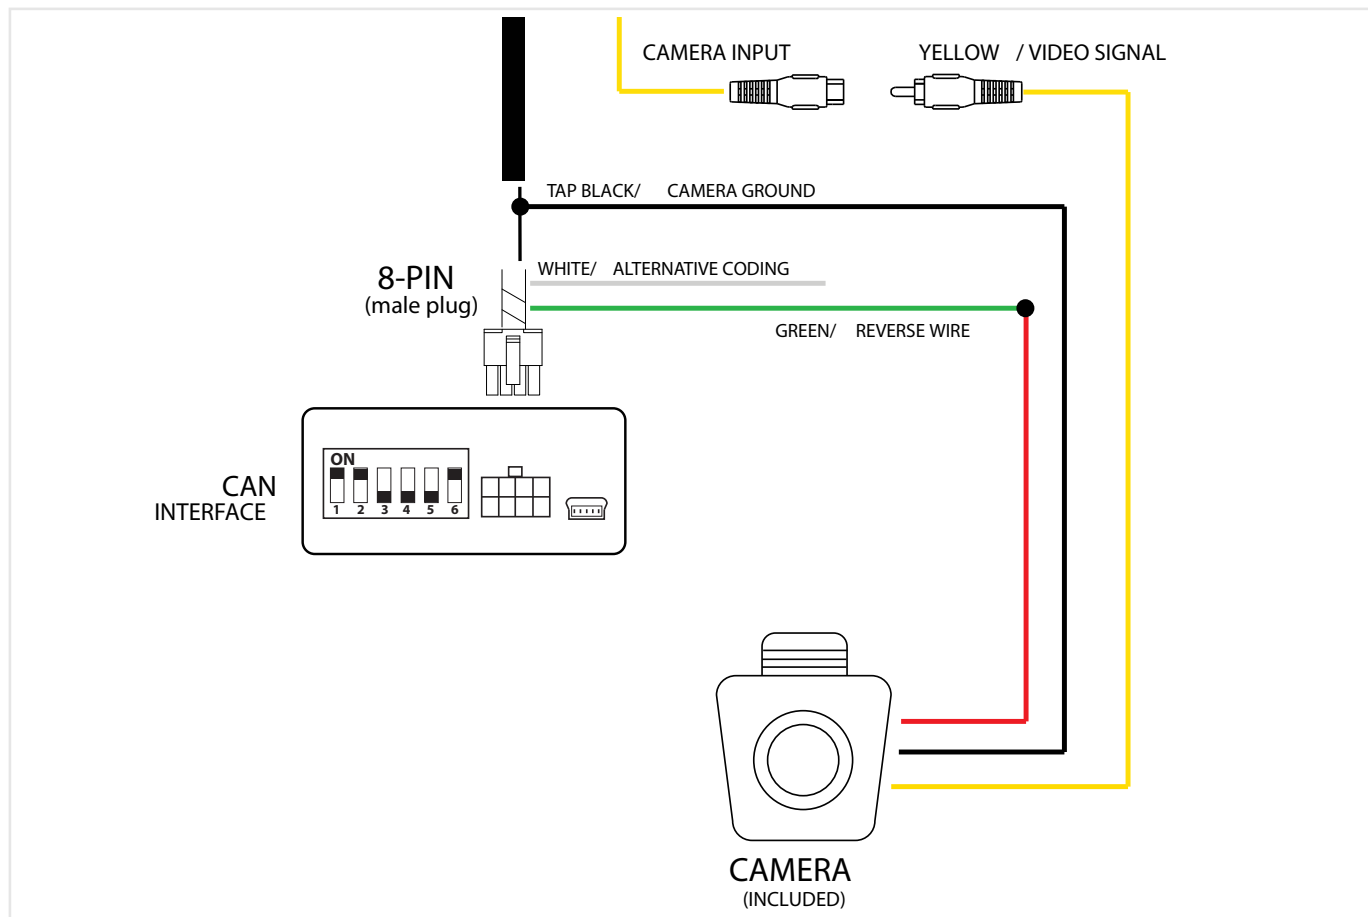


### DECODING THE VEHICLE REAR-VIEW CAMERA

In the case where you need to decode the aftermarket rear-view camera input, please do the following:

**Step 9** - With the T-Harness and interface module properly connected, turn the ignition to the "ON" position. Wait for the head unit to power on then proceed to the following steps.

On the left side of the steering wheel:

1. Press and Hold both the "Hash Key" and "End Call" buttons for 10 approx. 10 seconds. (See page 5 for HASH Key) During the coding process, the Red and Blue LED will begin to flash.
2. After the head unit has began to reset, release both buttons. The Red and Blue LED's will glow solid to identify the coding has been completed.

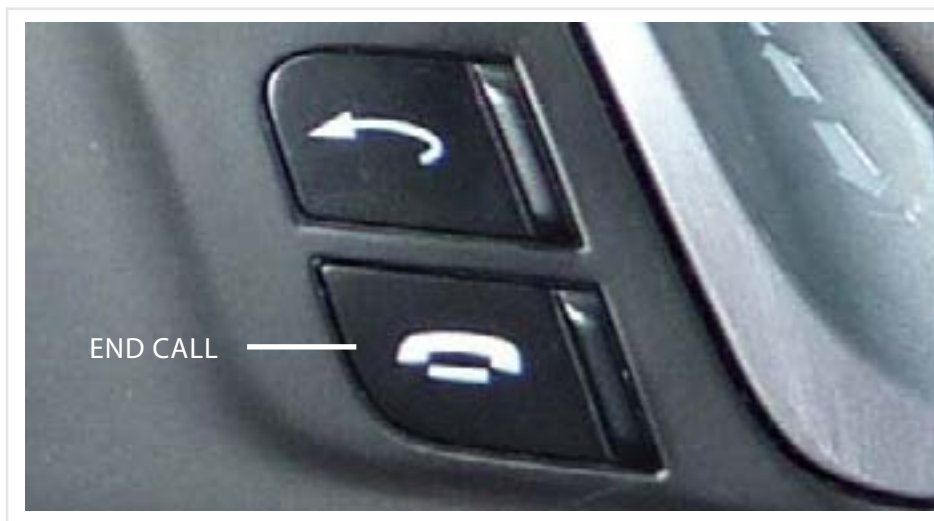

### ACTIVATING THE VIDEO IN-MOTION


To activate the Video In-Motion please do the following.

Option 1 - Permanent Activation: By activating dip switch number "1" to the "ON" position the Video In-Motion is permanently active.

Note: Having the Video In-Motion active will not affect the GPS performance.

SWITCH DIP 1 TO THE "ON"  
POSITION FOR PERMANENT  
ACTIVATION

CAN  
INTERFACE

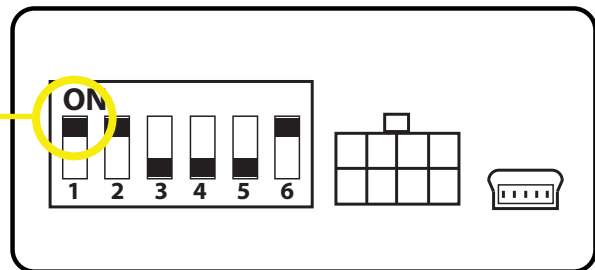

### CODING AND DECODING OPTIONS

You must code the park assist in order to retain.

#### CODING THE PARK ASSIST

Its necessary to code the vehicle in order to activate the factory Park-Assist, if equipped from the factory.

Step 1 - With the T-Harness and interface module properly connected, turn the ignition to the "ON" position. Wait for the head unit to power on then proceed to the following steps.

On the steering wheel:

1. Press and Hold both the "BACK" and "ANSWER" buttons for 10 approx. 10 seconds.  
During the coding process, the Red and Blue LED will begin to flash.
2. After the head unit has began to reset, release both buttons.  
The Red and Blue LED's will glow solid to identify the coding has been completed.

#### DECODING THE PARK ASSIST

In case you may need to remove the interface, here is how you decode the Park-Assist.

Step 1 - With the T-Harness and interface module properly connected, turn the ignition to the "ON" position. Wait for the head unit to power on then proceed to the following steps.

On the steering wheel:

1. Press and Hold both the "BACK" and "END CALL" buttons for 10 approx. 10 seconds.  
During the coding process, the Red and Blue LED will begin to flash.
2. After the head unit has began to reset, release both buttons.  
The Red and Blue LED's will glow solid to identify the coding has been completed

THE PARK ASSIST OPTION WILL NO LONGER BE AVAILABLE ON THE MENU.



## USING THE WHITE WIRE TO ACTIVATE THE REAR-VIEW CAMERA AND/OR PARK ASSIST

Aside from coding the vehicle using the Steering Wheel Controls, you can code the vehicle using the loose WHITE wire on the CAN module and dip switches 3 and 4.

Dip 3 = Rear-View Camera Enable

Dip 4 = Park Assist Enable

**Step 1** - With the T-Harness and interface module properly connected, turn the ignition to the "ON" position.  
Wait for the head unit to power on then proceed to the following steps.

On the CAN module:

1. Set dip switches 3 and 4 on the CAN module ON or OFF  
(Depending on Coding or Decoding)
2. Place 12V on the WHITE wire for approx. 5 Seconds.  
During the coding process, the Red and Blue LED will begin to flash.
3. After the head unit has begun to reset,  
release both buttons.  
The Red and Blue LED's will glow solid  
to identify the coding has been  
completed.

THE PARK ASSIST AND REAR-VIEW CAMERA  
OPTION WILL BE AVAILABLE ON THE MENU.



After coding is complete, you must wait 60 seconds until trying to code or decode the vehicle again.

### COMPATIBLE RADIOS

