

PRODUCT FEATURES:

- Replaces factory tailgate handle assembly.
- Selectable Parking Guide Line ON or OFF.
- Maintains the OEM look.


PARTS INCLUDED:

1. Tailgate handle camera
2. 26 ft. extension cable



INSTALLATION INSTRUCTIONS:

1. Remove the factory tailgate handle and remove the emblem and key cylinder.
2. Run the camera cable to the inside of the cabin towards the radio.
3. Make the power and video connections to the rear view camera integration interface or the aftermarket radio or the reverse light.
4. Install the emblem and key cylinder to the CNS-02F tailgate handle assembly.
5. Test the camera for functionality. Decide whether the parking guide line will be used or not. See below for instructions on how to turn it ON/OFF.
6. Install the new tailgate handle camera.

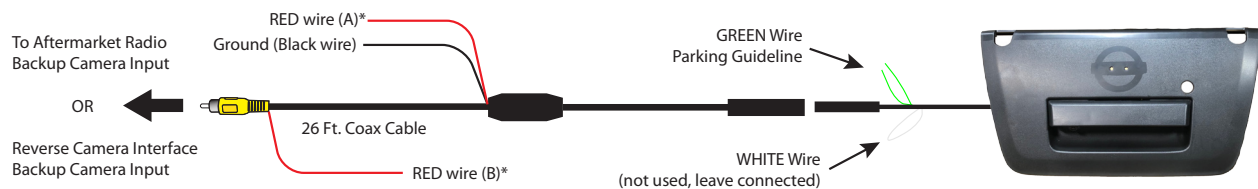

***NOTE:** To power the camera, use RED Wire A or B. If tapping power from the radio or RVC Interface, make sure to insulate RED Wire A to avoid it from shorting. If you will be tapping power from the reverse light +12V, insulate RED Wire B to avoid it from shorting. With either connection the Black GROUND wire needs to be connected to a solid chassis ground. For vehicles with manual transmission, we recommend tapping +12V power from the reverse light.

GREEN Wire: Connect to show parking guide line. Cut loop to remove guide lines. Insulate with tape to avoid from shorting.

WHITE Wire: Not used, do not cut.

Note: Cycle the camera power after connecting or disconnecting the GREEN control wire.

VEHICLE APPLICATIONS:

NISSAN

2013 - 2016 Frontier

NOTE: Nissan emblem and key cylinder not included.

