


PRODUCT FEATURES:

- With Parking Guide Lines that can be turned on and off.
- Underlip mount with a tiny footprint.
- 100 degree horizontal viewing angle.



PARTS INCLUDED:




MM-CML21 CAMERA



EXTENSION CABLE

INSTALLATION DIAGRAM:

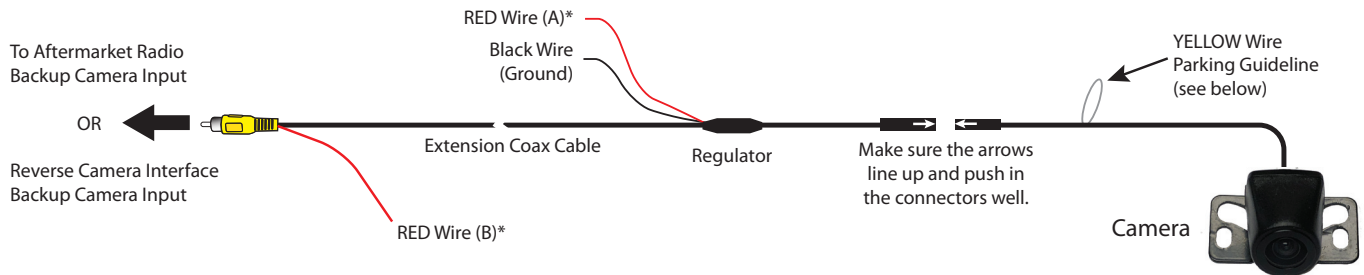

***NOTE:** The camera needs a +12V trigger. Power the camera at the headunit using RED Wire B or from the reverse light wire using RED Wire A. **DO NOT** connect both wires to +12V at the same time. Insulate the red wire that is not being used. Tap the Black wire to an existing ground lead, or ground Black wire securely to vehicle body metal.

Loop Wire Color	Function	Joined	Cut
Yellow	Parking Lines	ON (default)	OFF

MOUNTING OPTIONS:

