

PRODUCT FEATURES:

- Retains the factory Rear Seat Entertainment Screen when adding an aftermarket radio.
- Retains the use of the factory rear panel AV inputs when used with an aftermarket radio with AV Inputs
- Retains factory camera & microphone if equipped


NOTE:

The CRUX 2444A Rear Seat Entertainment screen retention harness & camera retention harness is used in conjunction with Crux part numbers SOOGM-16W, SWRGM-49A & DKGM-49A when installing an aftermarket radio.

PARTS INCLUDED:



Installation Diagram

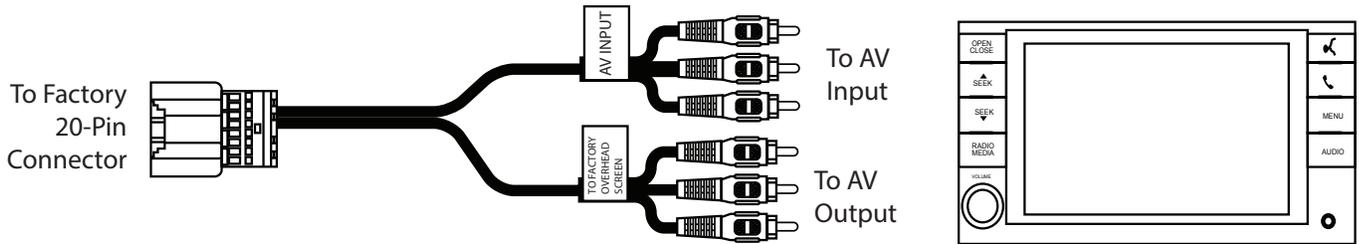

1. Remove the OEM radio and plug the CRUX 2444A's 20 pin connector to the vehicle's 20 pin factory RSE connector at the factory radio location. Use one of the Crux parts listed in the Note section.
2. To view videos from the aftermarket radio on the factory overhead screen, connect the RCA's labeled "TO FACTORY OVERHEAD SCREEN" to the aftermarket radio AV output .
3. To retain the use of the factory rear panel AV inputs, plug the RCA's labeled "AV INPUT" to the aftermarket radio's AV input (optional).
4. Test the audio & video on the overhead screen before installing the radio back into the dashboard

