Jeep Grand Cherokee Lip Mount Camera 2014 - 2017

#### **PRODUCT FEATURES:**

- Installs on your Jeep Grand Cherokee's rear hatch lip.
- 120° wide viewing angle.
- 0.4 Lux minimum for night driving.
- Selectable Parking Guide Line ON or OFF.

#### **PARTS INCLUDED:**








**EXTENSION CABLE** 

### **INSTALLATION DIAGRAM:**

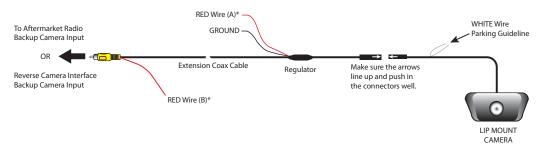

\*NOTE: The camera needs a +12V trigger. Power the camera at the headunit using RED Wire B or from the reverse light wire using RED Wire A. <u>DO NOT</u> connect both wires to +12V at the same time. Insulate the red wire that is not being used. Tap the Black wire to an existing ground lead, or ground Black wire securely to vehicle body metal.

Loop Wire Color	Function	Joined	Cut
White	Parking Lines	ON (default)	OFF

## **INSTALLATION PROCEDURE:**

- 1. The CCH-01G installs by the rear hatch release lever.
- 2. Run the camera cable to the inside of the rear hatch.
- 3. Connect the power of the camera according to the diagram above.
- 4. Connect the video cable of the camera to the extension cord provided.
- 5. Run the video extension cable to the back of the radio.
- 6. Connect the video cable to your aftermarket radio's camera input or to the rear view camera interface.
- 7. Put the gear in reverse to see the image from the camera.

# **VEHICLE APPLICATIONS:**

2014 - 2017 Jeep Grand Cherokee



1 of 1