

PRODUCT FEATURES:

- Replaces factory license plate light assembly.
- Selectable Parking Guide Line ON or OFF.
- Maintains the OEM look.


PARTS INCLUDED:

1. License Plate Light camera
2. 20" extension cable



INSTALLATION INSTRUCTIONS:

1. Carefully remove the factory license plate light.
2. Remove the bulb assembly and install in the CLR-10 camera housing.
3. Run the camera cable to the inside of the cabin towards the radio.
4. Make the power and video connections to the rear view camera integration interface or the aftermarket radio.
5. Test the camera for functionality.
6. Install the new license plate light camera.

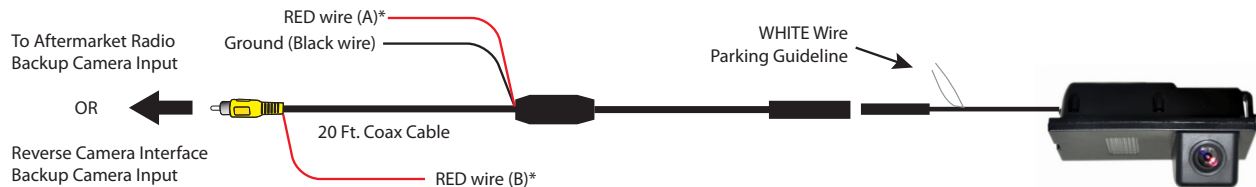

***NOTE:** To power the camera, use RED Wire A or B. If tapping power from the radio or RVC Interface, make sure to insulate RED Wire A to avoid it from shorting. If you will be tapping power from the reverse light +12V, insulate RED Wire B to avoid it from shorting. With either connection the Black GROUND wire needs to be connected to a solid chassis ground. For vehicles with manual transmission, we recommend tapping +12V power from the reverse light.

WHITE Wire: Connect to show parking guide line. Disconnect to remove. Insulate with tape to avoid from shorting.

Note: Cycle the camera power after connecting or disconnecting the control wire.

VEHICLE APPLICATIONS:

LAND ROVER

- 2004-2016 Discovery
- 2006-2014 Freelander 2
- 2004-2013 Range Rover Sport

