





PRODUCT FEATURES:

- Smart-Play Integration system allows connection of Android and other phones to the Lexus infotainment system.
- Integrates Wired/ Wireless Android Auto and CarPlay.
- Retains functionality of the OEM backup camera if present.
- Utilizes factory microphone for voice controls.
- Uses the factory Jog Mouse or Touch Pad for Smart-Play controls.



4 button Jog Mouse



4 button with MAP



5 button Jog Mouse



Touch Pad

PARTS INCLUDED:



ACPLX-12ZW Module



Power Harnesses



Smart-Play Interface Module



USB Extension Cable (Optional)



4K HDMI Cable



Aux Input Harness



GVIF Video Cables




Wireless RF Camera








WIRING DIAGRAM:

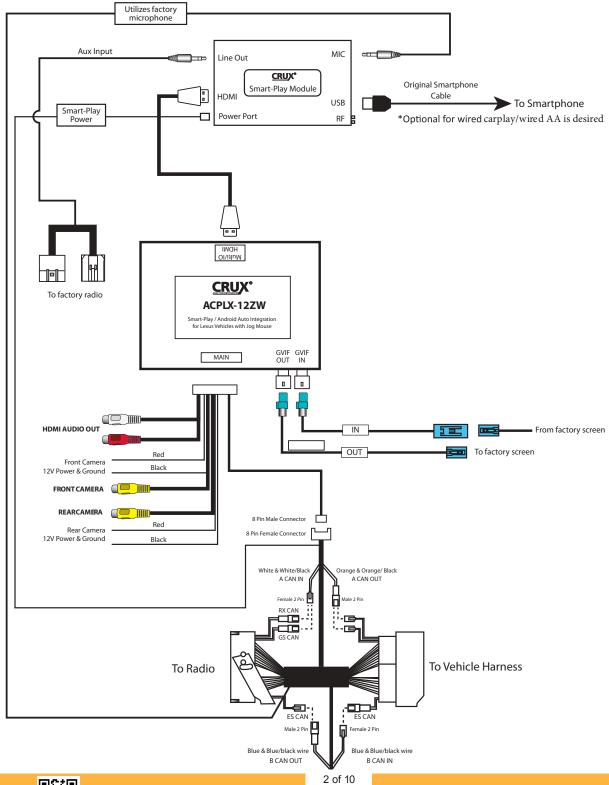







DIP SWITCH SETTINGS:



DIP	Setting	Applied Model Year	Jog Type	Vehicle (Screen Size)
1	DOWN	2014-2021	OEM Touch	GX 460 (8")
1,7	DOWN	2015-2017	Touch Pad	NX200t/300h (7")
1,8	DOWN	2016-2017	Jog Mouse	GS200T 350 / 450h / GS-F (8")
1,7,8	DOWN	2013-2015	Jog Mouse	RX 350 / 450h (8")
1,6	DOWN	2017-2020	Jog Mouse	IS 300/ 350 (10.25")
1, 6, 8	DOWN	2016-2017	Jog Mouse	GS 300 / 350 /450h /GS F, RX350 (12.3")
1, 6, 7	DOWN	2013-2015	Jog Mouse	GS 300 / 350 / 450h / GS F (12.3" PIP)
1, 6, 8	DOWN	2016-2019	Jog Mouse	RX350 / 450h (12.3")
1, 6, 7, 8	DOWN	2015-2017	Touch Pad	RC200t / 300 / 350 / RC F / NX200t (7")
1, 5, 8	DOWN	2014-2017	Jog Mouse	CT 200h (7")
1, 5, 7, 8	DOWN	2019-2021	OEM Touch	LC200 (Landcruiser) (9")
1, 5, 6	DOWN	2016-2018	OEM Touch	LC200 (Landcruiser) (8" type2)
1, 5, 6, 7	DOWN	2016-2018	Jog Mouse	ES300/ 300h (7")
1, 5, 6, 7, 8	DOWN	2016-2019	Jog Mouse	LX 570 (12.3")
1, 6, 7,	DOWN	2014-2016	Jog Mouse	IS 250/ 200T / 300 / 350 (7")

On vehicles with a 12.3" screen, you can change the screen resolution to show 5 horizontal App icons. GO to main menu and select "SETTINGS". Use the Jog Mouse to scroll and make changes the settings.










CAN CONNECTIONS:

The ACPLX-12ZW t-harness has CAN connections for use on specific Lexus models. See the connection chart below:

CAN Connection	<u>Lexus Model</u>	
GS CAN	CT, ES, GS, LS, NX & RC	
RX CAN	RX & LX	


Note: On some RX models, you will need to use the GS CAN connection if the Jog mouse controls do not work.

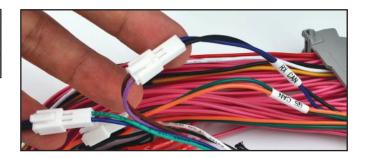

Follow the diagram below for the next steps.

Unplug the CAN connection to be used in the installation (RX CAN, GS CAN or ES CAN). The ES CAN will be connected to B CAN in and out. Plug the male RX or GS CAN A 2 pin connector to the female "A CAN IN" connector on the ACPLX-12Zw t-harness. Plug the female RX or GS 2 pin connector to the male "A CAN OUT" connector on the t-harness.

<u>IMPORTANT:</u> Unplug the CAN connection that WILL NOT be used in the application.

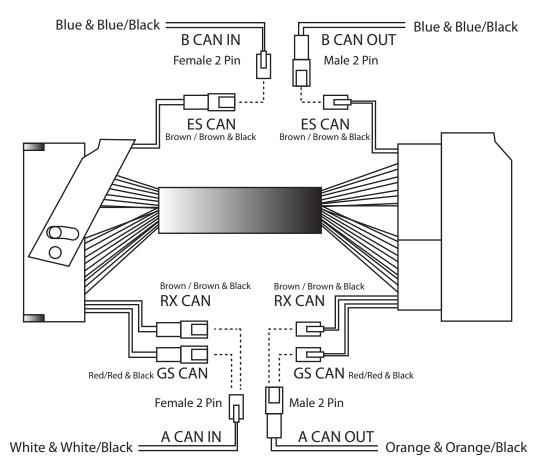



rev.010623





INSTALLATION INSTRUCTIONS:

NOTE: Connections are made behind the radio and behind the screen.



1. Remove the trim under the glove box.



2. Remove the right side trim along the center console.



3. The left side trim is secured with a bolt under the ignition button.



4. Pull out the center console from the back cup holder.




5. The radio is secured by 4 screws.



6. Plug the 62 pin t-harness provided to the factory radio.



7. Remove the AC vent and the trim around the factory screen.



8. Use the GVIF video cables provided and plug to the screen.



9. Plug in the HDMI cable provided to the ACPLX-12ZW and Smart Play module



5 of 10








INSTALLATION INSTRUCTIONS:

NOTE: Connections are made behind the radio and behind the screen.



10. Plug in the power harness and LVDS cables to the module.




11. Plug in the microphone cable to the Smart-Play module. Optional plug in original smartphone cable to USB Ext. cable for wired connectivity

WIRELESS CARPLAY/WIRELESS ANDROID AUTO CONNECTION SETTINGS

Android Auto Wireless connection



Apple Carplay Wireless Connection

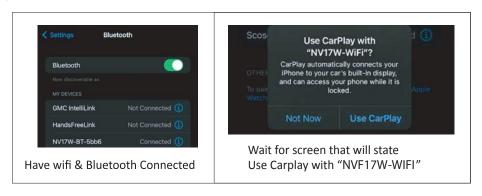



6 of 10 rev.010623








SMARTPHONE MIRRORING CONNECTION

Smartphone Mirroring Connection for Iphones




Smartphone Mirroring Connection for Androids

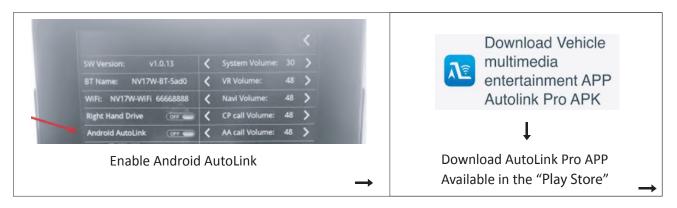







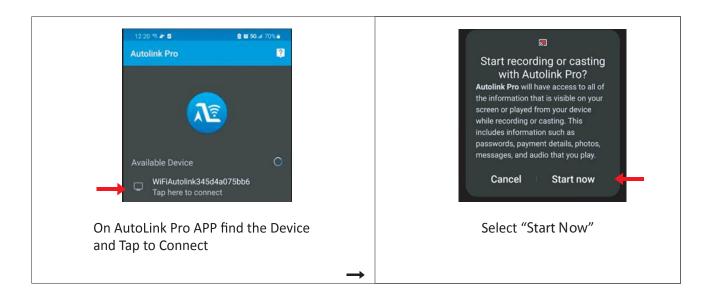

AUDIO INPUT TO VEHICLE:

The Smart-Play audio will use the vehicle's auxiliary input via the factory radio connector. Make sure to plug in the 3.5mm audio connector of the ACPLX-12ZW Aux-in harness to the Smart-Play module "Line Out" port. See diagram on page 2. Change the factory radio "Audio Source" to "AUX" in order for the Smart-Play audio to be heard on the factory audio system. Note that the factory aux input cannot be used while in Smart-Play mode.


The ACPLX-12ZW utilizes the factory microphone. Make sure to plug in the 3.5mm mic connector of the ACPLX-12ZW harness to the Microphone port of the Smart-Play module. See diagram on page 2.



Plug in the AUX-IN t-harness to the factory radio aux connector.



Select AUX for Audio source on the factory radio.







OPERATION:







4-button Jog Mouse

5-button Jog Mouse

Touch Pad

	I	j
MENU	Activate Siri or Google voice command	
HOME	Long press = Activate CarPlay / Android Auto	Short press = back to OEM screen
MAP (for 5-button)	Long press = Activate CarPlay / Android Auto	Short press = back to OEM screen
UP	Track Up	
DOWN Track Down		
JOG MOUSE	Navigate CarPlay / Android Auto	
RETURN	Return	

VEHICLE APPLICATIONS:

Compatible with Lexus vehicles with OEM Navigation and 4 or 5 button Jog Mouse or Touch Pad.

Lexus	
2014-2017	CT 200h
2013-2022	ES 350 / 300h
2013-2014	GS 350 / 450h
2015-2020	GS 200t / 350 / 450h / GS F
2018-2020	GS 300 / 350 / 450h / GS F
2013-2022	LS 460 / 600h L
2010-2020	RX 350 /450h
2014-2019	IS 250 / 200t / 300 / 350
2015-2017	RC 200t / 300 / 350 / RC F
2014-2019	NX 200t / 300h
2016-2020	LX 570
2018-2022	UX




9 of 10





TROUBLESHOOTING

*If your call audio does not use car's bluetooth, manually change it on the phone to select the vehicle during the call, then the phone should remember the last used setting





Changing the call audio routing setting to "BLUETOOTH HEADSET"

Go to Settings - Accessibility - Touch - Call Audio Routing. Keep it at "Automatic"

- 1. IF the screen is black & not showing factory infotainment screen or the CarPlay/Android Auto Screen
 - Confirm secure connection of GVIF cables to the top monitor.
 - Confirm GVIF cables are not damaged, pinched, kinked or bent.
- 2. No trigger issue /No click heard when long hold applied on MAP or home button
 - Check and confirm proper connection of the Main Car Interface Harness,
 - CAN bus board, and 30-pin Car Interface Harness.
 - Check and confirm no loose pins or damage to the harness. Green/RED LED Light should be visible from the Metal Box
- 3. When long hold is applied on MAP or Home button, black screen appears
 - Confirm proper secure connection of the HDMI Cable.
 - Confirm power wire is connected on the CarPlay Box. Red LED light should be visible from the CarPlay Box.
- 4. Screen image glitching or distorted
 - Confirm correct dip switch setting.
- 5. Hands free call quality noise and echo
 - For iPhone, confirm the phone is connected to your vehicle via Bluetooth and
 - "Call Audio Routing setting" Keep it at "Automatic"
 - For Android, confirm Bluetooth is being used for calls by observing phone's call audio output.
- 6. No sound
 - Confirm AUX cable connection, which is on the HDMI side of the CarPlay Box.
 - Confirm Car Media Source is in AUX mode. Confirm sound output from the phone to CarPlay module.
- 7. Siri does not recognize my voice
 - Confirm Microphone jack connection (3.5mm), which is on the USB side of the CarPlay Box.
 - Confirm that there are no wire damage.
- 8. Switching from Smart-Phone Mirroring to CarPlay/Android Auto
 - If device is unresponsive or glitching, turn vehicle off and allow module to sleep then try again.

